

**CHAPTER 12.12
SIDEWALK CONSTRUCTION**

Sections:

- 12.12.050 Paver District Description
- 12.12.010 Sidewalk Requirements
- 12.12.015 Activity Trail Specifications
- 12.12.020 Curb Requirements
- 12.12.025 Curb Ramps Required at Intersections
- 12.12.030 Rolled Curb Allowed
- 12.12.060 Duty to Maintain Sidewalks
- 12.12.062 Permit Requirements for Curb and Sidewalk Repairs
- 12.12.065 Obstructions Allowed in the Paver District
- 12.12.080 Deviations
- 12.12.090 Violation

12.12.050 Paver District Description.

The Paver District which is defined as the following area: Commencing at the north edge of Broadway Avenue and the centerline of Cedar Avenue, thence north easterly along the north edge of Broadway Avenue to the centerline of Alder Street, thence south easterly along the centerline of Alder Street to the centerline of Fourth Avenue, thence south westerly along the centerline of Fourth Avenue to the centerline of Beech Street, thence north westerly along the centerline of Beech Street to the south edge of Third Avenue, thence south westerly along the south edge of Third Avenue to the centerline of Cedar Street, thence along the centerline of Cedar Street to the point of beginning. See attached Exhibit A. (Ord 2906, 8/14/18)

12.12.010 Sidewalk Requirements:

- A. Sidewalks shall be constructed whenever new curb is constructed. All municipal sidewalks shall be constructed of natural colored Portland cement concrete in accordance with the *Community Street and Utility Standards*, except that sidewalks in the Paver District shall be constructed of concrete brick pavers in accordance with plans drawn by the Municipal Services Department. Municipal sidewalks in all residential zones shall be constructed adjacent to a minimum five foot (5') planter area; however, in existing developed residential areas, reconstruction of sidewalks shall match existing sidewalk improvements. The planter areas shall be covered by eighty percent (80%) living plant material and maintained in good condition. In the Paver District, the sidewalks shall be constructed for the full area between the back-of-curb and the right-of-way.
- B. Sidewalks shall be constructed so as to avoid all physical obstructions. However, the Municipal Services Director may allow planters, trash cans, benches, utility poles, fire hydrants, tree wells, trees, traffic signal controllers, etc. to be installed in

the sidewalk areas that are within the Paver District and commercial zones. In all cases, sidewalks shall be constructed to provide a minimum of five feet (5') of clearance from all obstructions. (Ord. 2270, 8/22/06; Ord. 2222, 8/9/05; Ord. 1443, 1990; Ord. 1301, 1987)

12.12.015 Activity Trail Specifications: Activity trails shall be installed along routes as directed or approved by City Council. Activity trails shall be constructed per plans that are approved by the Municipal Services Director. Construction shall be consistent with requirements of the *Community Street and Utility Standards* with the exception that activity trails in the Paver District shall be constructed with concrete brick pavers per Section 12.12.010 of the Moses Lake Municipal Code. (Ord. 2222, 8/9/05; Ord. 1443, 1990)

12.12.020 Curb Requirements: All curbs shall be constructed of natural colored Portland cement concrete and shall be constructed in accordance with the *Community Street and Utility Standards*; however, in existing developed areas, curbs shall be constructed in accordance with existing curb improvements. (Ord. 2222, 8/9/05; Ord. 1443, 1990; Ord. 1301, 1987)

12.12.025 Curb Ramps Required at Intersections: New curb construction or curb replacement shall include the installation of curb ramps at intersections. At intersections where a single curb ramp is being installed, at least one (1) additional curb ramp shall be installed on the opposite side of the street as an egress ramp, if one (1) doesn't already exist. Curb ramps shall be constructed in accordance with the *Community Street and Utility Standards*. (Ord. 2222, 8/9/05; Ord. 1443, 1990)

12.12.030 Rolled Curb Allowed: Rolled curb is not allowed on new streets. Rolled curb may only be installed to replace existing rolled curb. (Ord. 2270, 8/22/06; Ord. 2222, 8/9/05; Ord. 1443, 1990)

12.12.060 Duty to Maintain Sidewalks:

- A. The owner or occupier of property that abuts sidewalks shall bear the duty and expense of maintaining sidewalks in a good state of repair, free from obstructions, and in a clean condition. However, the city shall bear the duty and expense to repair sidewalks in the Paver District that are constructed with concrete brick pavers, and all sidewalks that were constructed of concrete brick pavers through city participation. For sidewalks to be in a good state of repair, the sidewalks shall not have any vertical differences of one inch (1") or greater; and they shall not have any contiguous areas of spalling greater than four (4) square feet. Exposed aggregate in existing sidewalks shall be considered spalling when the surface wear measures one-quarter inch (1/4") or greater in differential elevation.
- B. The city may participate in sidewalk repairs for sidewalks that are wider than six feet (6'). Such participation may be made for sidewalk repairs that are within the right-of-way and that are beyond the first six feet (6') of sidewalk nearest to the curb. Such participation is valid only if the city has provided written pre-approval for the sidewalk repairs. When the city agrees to participate with sidewalk repairs

CITY OF MOSES LAKE MUNICIPAL CODE

CHAPTER 12.12 - SIDEWALK CONSTRUCTION

for over-width sidewalks, the owner will pay the contractor for the full repairs; and the city will make payment directly to the owner for pre-approved sidewalk repairs after the owner has provided a paid invoice from their contractor.


C. Chapter 12.20 of the Moses Lake Municipal Code provides requirements for sidewalk service requirements. (Ord. 2222, 8/9/05; Ord. 2070, 7/23/02; Ord. 1102, 1983; Ord. 1057, 1982)

12.12.062 Permit Requirements for Curb and Sidewalk Repairs: All curb and sidewalk repairs require a Street and Utility Construction Permit in accordance with Chapter 12.16 of the Moses Lake Municipal Code. However, a permit is not required if sidewalk panels are either lifted or lowered to eliminate a hazard, provided that adjacent improvements are not disturbed in the process. (Ord. 2222, 8/9/05)


12.12.065 Obstructions Allowed in the Paver District: Owners in the Paver District may place items such as small tables, chairs, flower pots, and benches on the first three-foot (3') area of their abutting sidewalk as measured from the property line, but said sidewalks shall be nine feet (9') wide or greater and shall provide a minimum of five feet (5') of clearance for clear passage. Advertisements, signs, and similar items are not permitted with this authorization. (Ord. 2222, 8/9/05)

12.12.080 Deviations: The City Council may grant a deviation to the standards set forth in this chapter upon the findings that the granting of a deviation is in the best interest and welfare of the community. (Ord. 2222, 8/9/05)

12.12.090 Violation: Any person, firm, or corporation violating or failing to comply with the provisions of this chapter may be subject to a Notice of Violation and Order to Correct or Cease Activity as provided in Chapter 1.20 issued by the Code Enforcement Officer. (Ord. 2346, 9/11/07; Ord. 2222, 8/9/05)


PAVER DISTRICT
 SEE MOSES LAKE MUNICIPAL
 CODE CHAPTER 12.12

MOSES LAKE

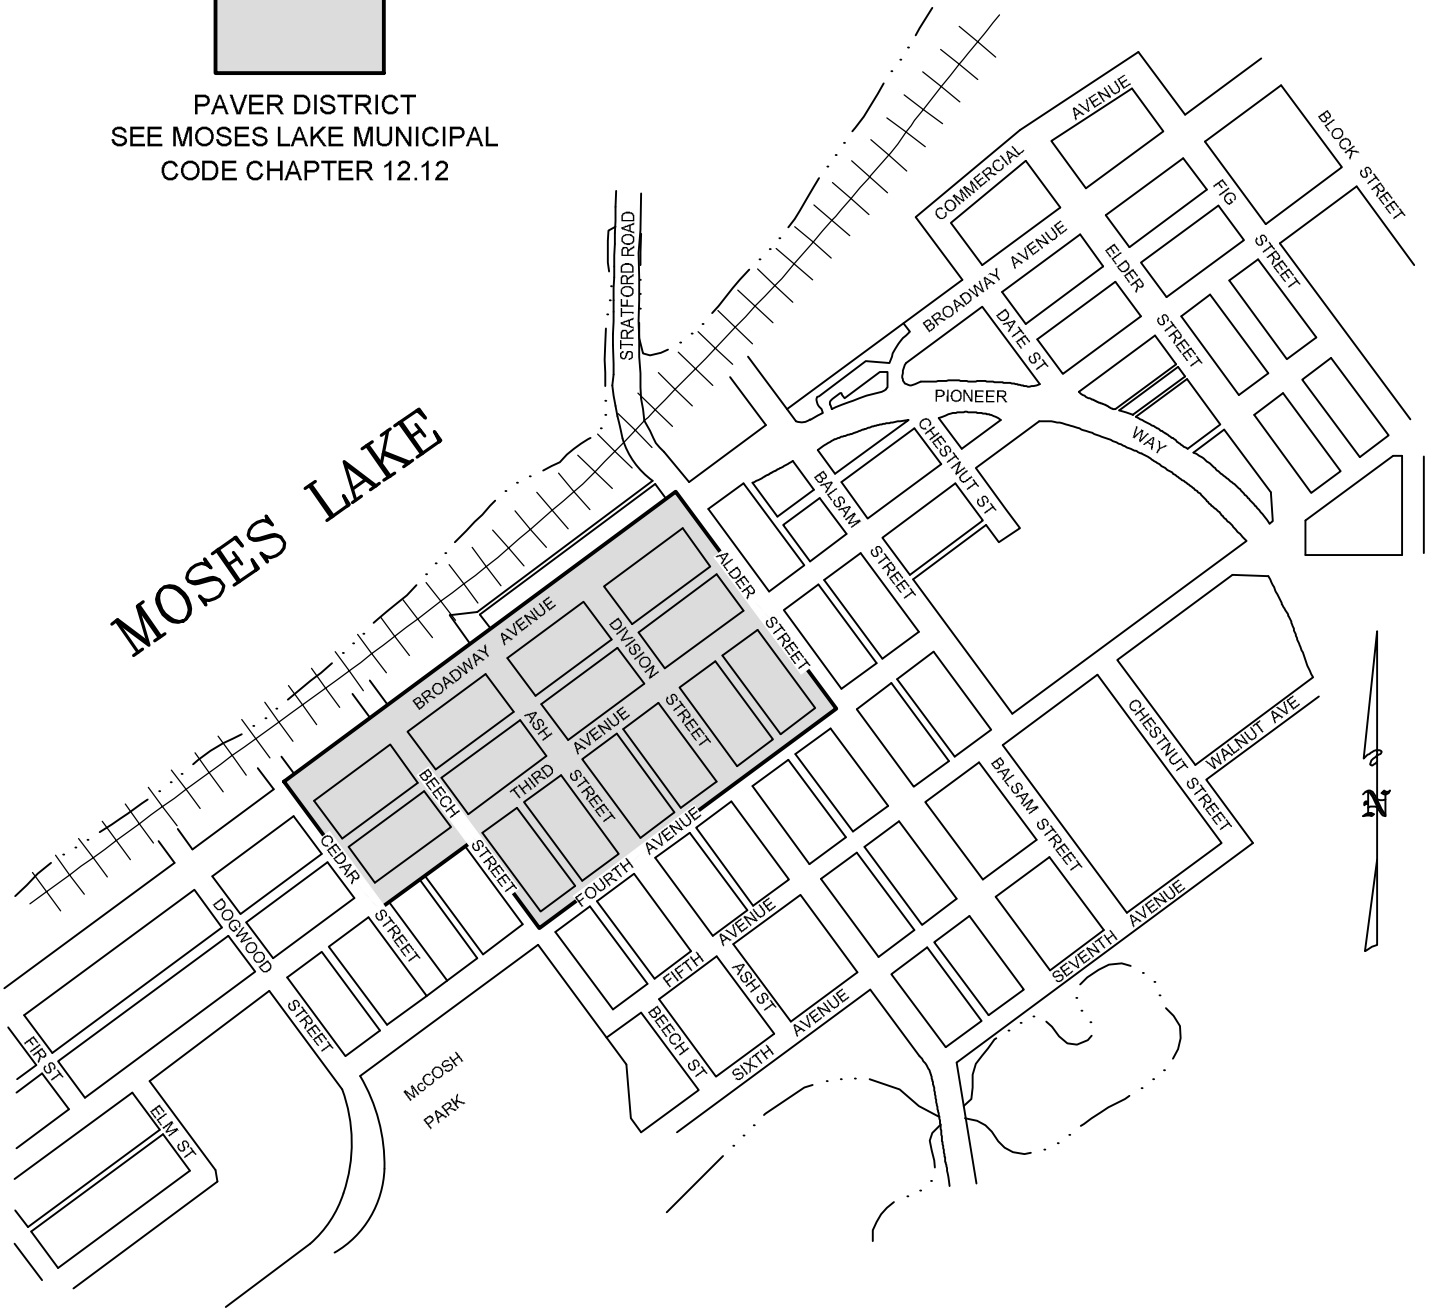

NOTES:

1. CONSTRUCTION PLANS MAY BE REQUIRED FROM A PROFESSIONAL ENGINEER PRIOR TO AUTHORIZATION FROM THE CITY.
2. PAVERS MAY BE AUTHORIZED OUTSIDE OF THE PAVER DISTRICT. OWNER SHALL BE RESPONSIBLE FOR ALL COSTS OF INSTALLATION AND MAINTENANCE OF THE PAVERS.
3. ALL CONSTRUCTION AND MATERIALS SHALL MEET THE SPECIFICATIONS AND REQUIRE AUTHORIZATION BY THE CITY OF MOSES LAKE.

PAVER DISTRICT			
MUNICIPAL SERVICES DEPT. - ENGINEERING DIVISION			
DRAWN	RPM	CITY OF MOSES LAKE	
CHECK	MORO	A-1	
SCALE	NONE		
DATE	12/12	GRANT COUNTY	WASHINGTON

DATE	REVISION	BY
08/18	AMENDED	MLL

N:\ENG-SERVER\Drawings\COMMUNITY STANDARDS\2018 REVISED\1-PAVERS.DWG PLOT: August 16, 2018 at: 10:28am